



SUNSHADES



All AMETCO SUNSHADES
are manufactured in our
Willoughby, Ohio plant


Visit our Web Site www.ametco.com



ALUMINUM SUNSHADE


Style 102-45

2" x 1/2" on 2 7/16" Centers
Aluminum Extrusion 45° Angle

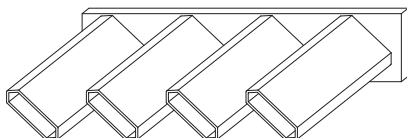


Style 102-90

2" x 1/2" Bar on 1 3/8" Centers
Aluminum Extrusion

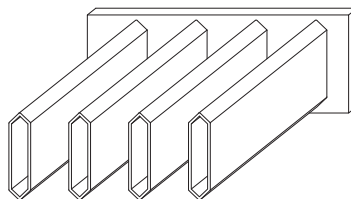


Style 104-45

4" x 1/2" on 4 7/16" Centers
Aluminum Extrusion 45° Angle



Style 104-90


4" x 1/2" on 2 1/2" Centers
Aluminum Extrusion




Styles above are designed with the depth of the bar required to achieve 60 degrees incident angle of sun shade.

Ametco Aluminum Sunshades are manufactured from aluminum extrusions that are designed to have minimum top surface upon which dirt and snow can accumulate. The tube design extrusion keeps the weight to a minimum while maintaining the strength required to stand up to the severest weather. All sunshades are then powder coated for lasting beauty.


Ametco Mfg. Corp. certifies that its Sunshade system is free from defects in material and workmanship. The polyester-coated material is guaranteed not to crack, peel or blister for a period of 20 years. Accidental damages, defects resulting from improper installation and damage from vandalism or abuse are not included. Warranty is limited to a prorated value of the coating.

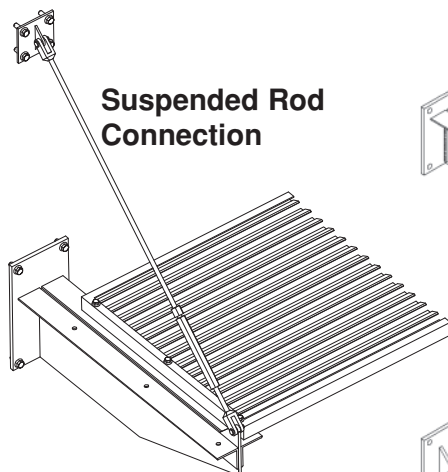

Suspended Rod Connection

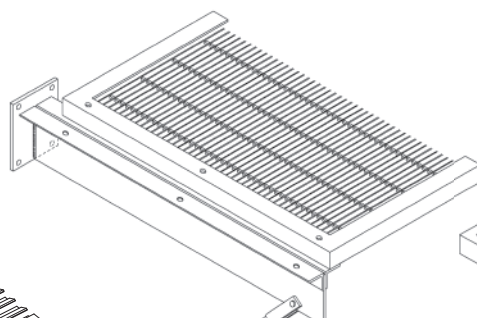

Support Rod Connection

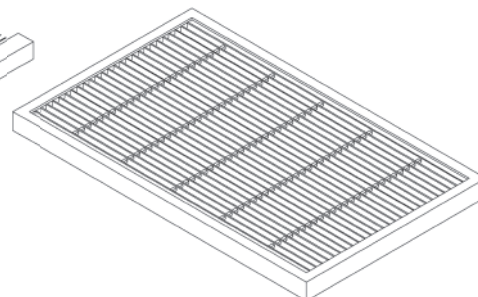

Channel Frame for Bar Grille & Fixed Louver Sunshade

Suspended or supported rod connections are recommended for sunshades over 5 feet wide.

In the interest of improving quality and design, Ametco reserves the right to amend specifications without giving prior notice.




LOUVER SUNSHADE



Style 201

80% Direct Visual Screening



6' Maximum Span

Style 202


100% Direct Visual Screening




6' Maximum Span

STANDARD OUTRIGGER FOR AMETCO SUNSHADES

Intermediate Outrigger for
Curtain Wall Mounting

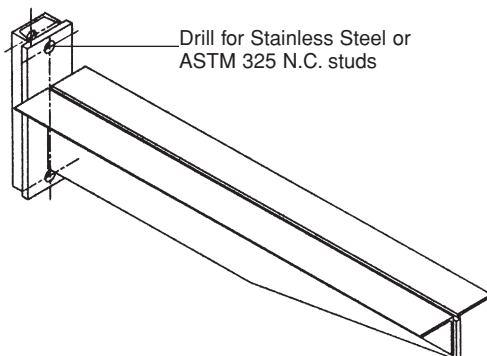

Intermediate Outrigger for
Structural Column or Concrete Wall

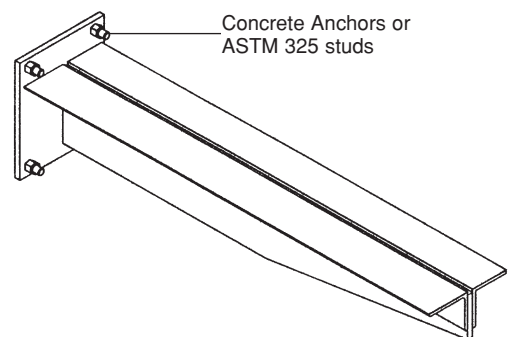




PERFORATED SUNSHADE




Perforated Patterns

Round




Staggered Centers




Straight Centered

Square



Staggered Rows



Straight Rows

Perforated Sunshades allow you to choose the size and shape of the perforation as well as the percent of open area from 10% to 50%.

Visit our Web Site www.ametco.com for Master Spec • CAD Drawings • Photo Gallery



4326 Hamann Parkway
P.O. Box 1210
Willoughby, Ohio 44096
Web Site www.ametco.com

Phone (440) 951-4300
Fax (440) 951-2542
Toll Free 800-362-1360
E-Mail ametco@ametco.com